Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 194327

SGS-THOMSON MICROELECTRONICS

2N2102

GENERAL PURPOSE AMPLIFIER AND SWITCH

DESCRIPTION

The 2N2102 is a silicon planar epitaxial NPN transistor in Jedec TO-39 metal case. It is intended for a wide variety of small-signal and medium power applications in military and industrial equipments.



TO-39

INTERNAL SCHEMATIC DIAGRAM



ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-base Voltage (I_E = 0)	120	V
V_{CEO}	Collector-emitter Voltage (I_B = 0)	65	V
V_{CER}	Collector-emitter Voltage ($R_{BE} \leq 10\ \Omega$)	80	V
V_{EBO}	Emitter-base Voltage (I_C = 0)	7	V
I_C	Collector Current	1	A
P_{tot}	Total Power Dissipation at $T_{amb} \leq 25$ °C at $T_{case} \leq 25$ °C	1 5	W W
T_{stg}, T_j	Storage and Junction Temperature	– 65 to 200	°C

THERMAL DATA

$R_{th\ j\text{-}case}$	Thermal Resistance Junction-case	Max	35	°C/W
$R_{th\ j\text{-}amb}$	Thermal Resistance Junction-ambient	Max	175	°C/W

ELECTRICAL CHARACTERISTICS (T_{amb} = 25 °C unless otherwise specified)

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
I_{CBO}	Collector Cutoff Current (I_E = 0)	V_{CB} = 60 V V_{CB} = 60 V	 T_{amb} = 150 °C			2 2	nA µA
I_{EBO}	Emitter Cutoff Current (I_C = 0)	V_{EB} = 5 V				5	nA
$V_{(BR)\ CBO}$	Collector-base Breakdown Voltage (I_E = 0)	I_C = 100 µA		120			V
$V_{CEO\ (sus)}$*	Collector-emitter Sustaining Voltage (I_B = 0)	I_C = 30 mA		65			V
$V_{CE\ (sat)}$*	Collector-emitter Saturation Voltage	I_C = 150 mA	I_B = 15 mA			0.5	V
$V_{BE\ (sat)}$*	Base-emitter Saturation Voltage	I_C = 150 mA	I_B = 15 mA			1.1	V
h_{FE}*	DC Current Gain	I_C = 10 µA I_C = 100 µA I_C = 10 mA I_C = 150 mA I_C = 500 mA I_C = 1 A	V_{CE} = 10 V V_{CE} = 10 V V_{CE} = 10 V V_{CE} = 10 V V_{CE} = 10 V V_{CE} = 10 V	10 20 35 40 25 10		120	
h_{fe}	High Frequency Current Gain	I_C = 50 mA f = 20 MHz	V_{CE} = 10 V		6		
NF	Noise Figure	I_C = 300 µA BW = 1 Hz	V_{CE} = 10 V f = 1 KHz R_G = 510 Ω			8	dB
C_{CBO}	Collector-base Capacitance	I_E = 0 f = 1 MHz	V_{CB} = 10 V			15	pF
C_{EBO}	Emitter-base Capacitance	I_C = 0 f = 1 MHz	V_{EB} = 0.5 V			80	pF

* Pulsed : pulse duration = 300 µs, duty cycle = 1 %.

TO39 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	12.7			0.500		
B			0.49			0.019
D			6.6			0.260
E			8.5			0.334
F			9.4			0.370
G	5.08			0.200		
H			1.2			0.047
I			0.9			0.035
L	45^{o} (typ.)					

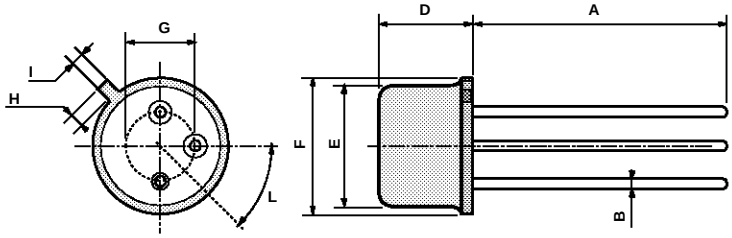

P008B

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsability for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may results from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied.
SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectonics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES
Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A